



# Franklin<sup>®</sup>













ITEM # 12384F4 - PROFESSIONAL STEEL GOAL  
ITEM # 12380F4 - CHAMPIONSHIP STEEL GOAL

## ASSEMBLY INSTRUCTIONS


### 1). PREPARATION FOR ASSEMBLY

- o Lay out all parts within easy reach.
- o Read instructions completely before starting assembly.
- o Assemble goal on smooth, flat surface.
- o Adult supervision for assembly and use of goal is recommended.



© NHL  
**Franklin<sup>®</sup>**  
FRANKLIN SPORTS INC.  
Stoughton, MA. 02072  
[www.franklinsports.com](http://www.franklinsports.com)

FOR REPLACEMENTS PARTS CALL  
1-781-341-5178 OR 1-800-225-8649  
OR VISIT [WWW.FRANKLINSPO RTS.COM](http://WWW.FRANKLINSPO RTS.COM)

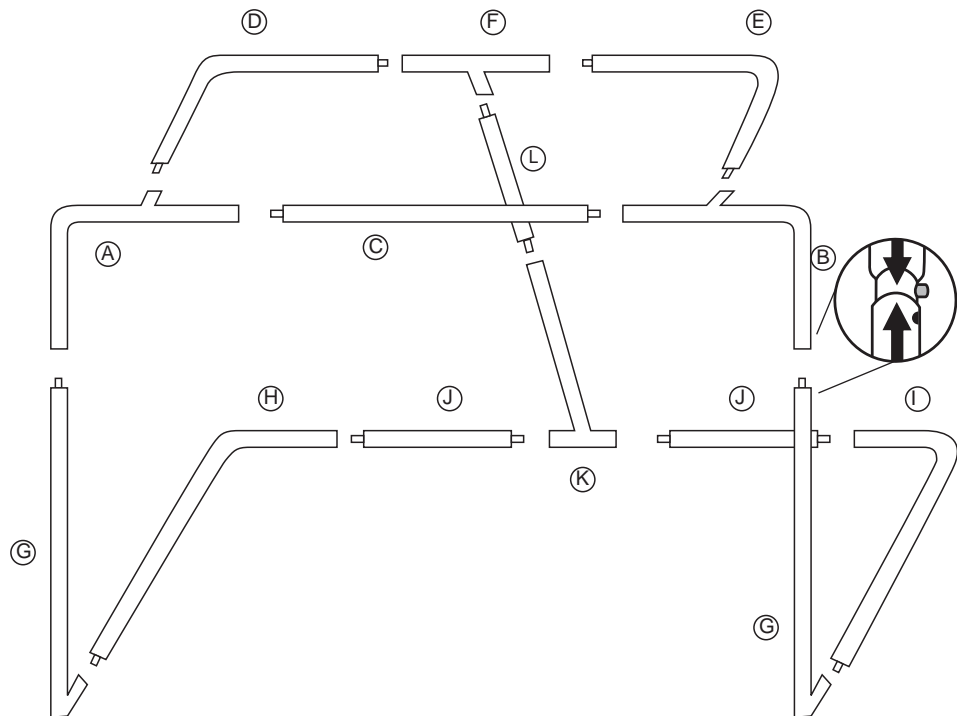


## 2). GOAL ASSEMBLY

- o Assemble all pieces of tubing as shown.
- o Tubes with welded loops must face the correct direction for net attachment.
- o Tubes will insert tightly into the adjoining tube with a twisting motion.
- o Be sure all pieces are completely inserted until locking buttons snap into place.

## 3). POSITIONING NET ON GOAL

- o Position net on goal frame with colored tape markers in correct locations as shown.
- o To help hold net in position it should be temporarily tied on at the red tape markers.
- o The protective “plastic sleeves” from tubing can be conveniently used as temporary ties.

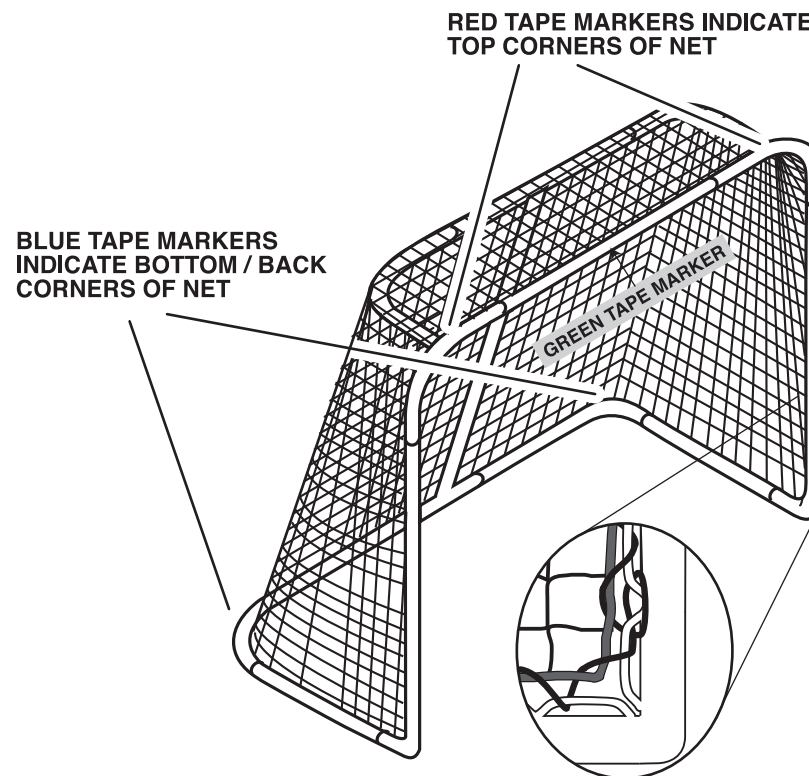

## 4). ATTACHING NET TO GOAL

- o Use the polyester rope ties to attach net to welded metal loops.
- o Tie one end of both ropes onto welded loop at top/center green tape marker on the net.
- o Weave the rope ties through the welded loops and the reinforced perimeter edge of the net.
- o Continuously pull rope ties tightly as you attach net perimeter to the metal loops.
- o At tube connections, “double back” through the welded loops on both sides of the joint.
- o Proceed with both ropes in opposite directions until they meet at the center back/bottom.
- o Tie off both ropes with secure knots [cut off excess rope].